

In Process of Patent Application

JCCW Water Treatment System

【fastest smallest optimum results】

~ JCCW-30 JCCW-60 JCCW-120 JCCW-240 ~



■ Characteristics of JCCW Series ■

- Compact, small installation area. Optimum for urban engineering
- High treatment efficiency. JCCW-30 type, installation area is 2.4m³ and maximum treating possible is 45m³/h
- Treatment Effect is good. Impurity Level of treated water is near '0'
- Easy Operation. Requires only the setting of flocculating agent input
- Easy set up. Requires 2 tons Truck (JCCW-30type) for transport, easy set up and easy demobilization in short time by single person
- Long Life. Uses FLYGT Churner. Can be used for more than 20 years
- Injector has a moisture protection heater and Bridge protection device
- Wide range of Usage. Applicable to Seawater
- Easy Draining. No need for expensive hydro-extractor. Uses PP Bag



■JCCW-30 type specs

	items	specs
1	Processing Capacity	5.0m ³ /h → 30m ³ /h
2	Churner	1.5kW Stainless
3	Voltage	200V
4	External Dimensions	L2.7 × W0.9 × H1.8
5	Feeder	0.75kW Stainless

■JCCW-120 type specs (Detached Churn & Sedimentation tanks)

	items	specs
1	Processing Capacity	30m ³ /h → 120m ³ /h
2	Churner	1.5kW+1.5kW Stainless
3	Voltage	200V
4	Churn Box External Dimensions	L1.8 × W2.0 × H2.0
	Sedimentation Tank External Dimensions	L2.0 × W2.0 × H1.8
5	Feeder	0.75kW Stainless


■JCCW-60 type specs

	items	specs
1	Processing Capacity	10m ³ /h → 60m ³ /h
2	Churner	1.5kW+0.9kW Stainless
3	Voltage	200V
4	External Dimensions	L3.0 × W1.4 × H1.8
5	Feeder	0.75kW Stainless


■JCCW-240 type specs (Detached Churn & Sedimentation tanks)

	items	specs
1	Processing Capacity	50m ³ /h → 240m ³ /h
2	Churner	1.5kW+1.5kW+1.5kW Stainless
3	Voltage	200V
4	Churn Box External Dimensions	L3.0 × W2.0 × H2.0
	Sedimentation Tank External Dimensions	L4.5 × W2.0 × H1.8
5	Feeder	0.75kW Stainless

■JCCW-30 type frame diagram

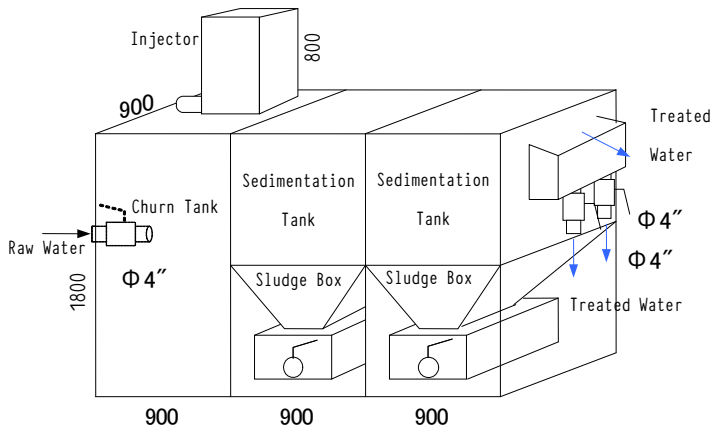

■JCCW-120 type 3D frame diagram

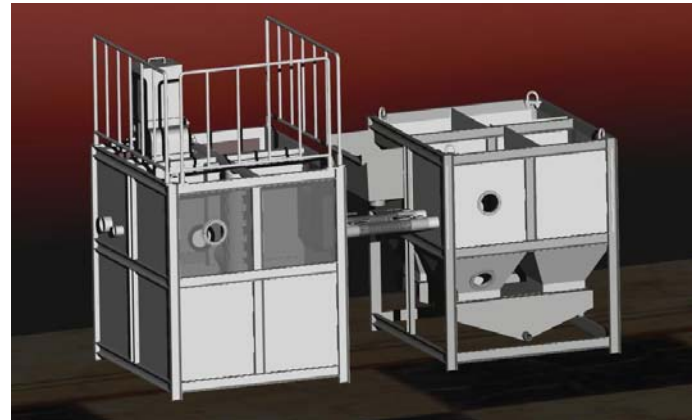

JCCW-30 Type Front Photo



JCCW-30 Type Back Photo



Injector (50kg) Photo

Manufacturer - Retailer: **J & C Corporation**

〒063-0868 Sapporo-shi Nishi-ku Hachi-ken 8-jou Higashi 3 Chome 1 -25

TEL (011) 790-6525 Fax (011) 790-6524

E-mail : kyotic@yahoo.co.jp